









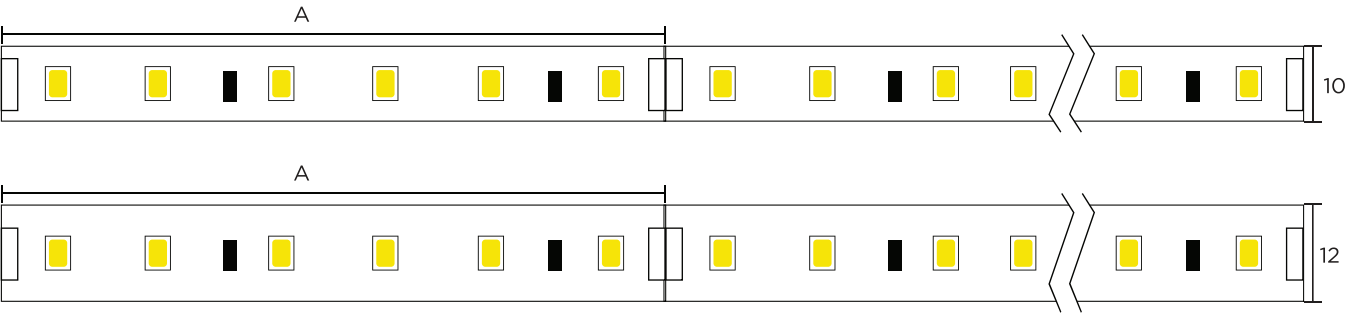
StripMaster-2 (SM-02)

HIGH BRIGHTNESS



							
DC 24V	Compliant	3 STEP MacAdam	Dimmable	Stabilized Current	3-year Warranty	Certificate	Certified Product

DIMENSION : mm.



General Information

To produce our indoor and outdoor flexible LED strips and a current stabilization system inside the LED strip.

Thermal conductive adhesive tape guarantees perfect heat transfer to the mounting surface. All of our product features guarantee extra on life time and stable performance.

Our flexible LED light strips are designed for long-term professional lighting applications and perfectly fit in any linear or curved applications.

StripMaster-2 is designed for High Brightness area.

Standard Information

Chip:	2835
Input Voltage (V) :	24V
PCB Color :	White
IP :	20 / 65
Strip Length :	5 m. / Reel
CRI :	> 80

Technical Data For **SM-02**

2700K 3000K 3500K 4000K 6000K 6500K

Chip	LED Qty/m	Power (W)	Luminance (lm/m)	Cutting Length (A) (mm)	PCB Width (mm)
2835	128	19.2	2500	62.5	10
	240	28.8	4000	33.3	12

Remark: PCB of waterproof type might be wider.

Order Code

Series :	IP / Power (W)	CCT :
SM - 02	0 / 000	00
02	1 - 20 192 - 19.2	27 - 2700K
	6 - 65 288 - 28.8	30 - 3000K
		35 - 3500K
		40 - 4000K
		60 - 6000K
		65 - 6500K