





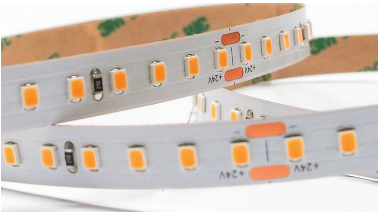


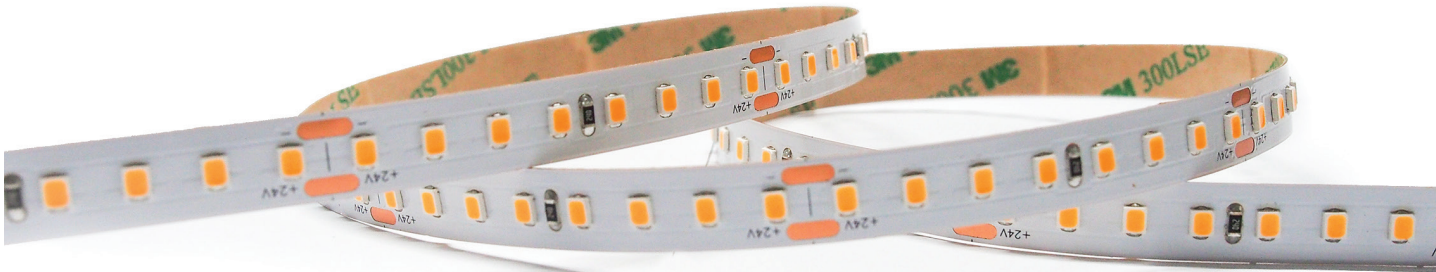


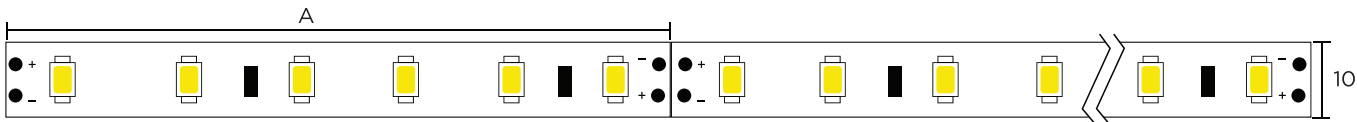
StripMaster-3 (SM-03)

CRI 95



							
DC 24V	Compliant	3 STEP MacAdam	Dimmable	Stabilized Current	3-year Warranty	Certificate	Certified Product

DIMENSION : mm.



General Information

To produce our indoor and outdoor flexible LED strips and a current stabilization system inside the LED strip.

Thermal conductive adhesive tape guarantees perfect heat transfer to the mounting surface. All of our product features guarantee extra life time and stable performance.

Our flexible LED light strips are designed for long-term professional lighting applications and perfectly fit in any linear or curved applications.

StripMaster-3 is designed for realistic color area needed with high CRI95.

Standard Information

Chip:	2835
Input Voltage (V) :	24V
PCB Color :	White
IP :	20 / 65
Strip Length :	5 m. / Reel
CRI :	95

Technical Data For **SM-03**

2700K 3000K 3500K 4000K 6000K 6500K

Chip	LED Qty/m	Power (W)	Luminance (lm/m)	Cutting Length (A) (mm)	PCB Width (mm)
2835	80	12	1200	100	10
	128	19.2	2200	62.5	10

Remark: PCB of waterproof type might be wider.

Order Code

SM -	Series : 03	IP / Power (W) 0 / 000	CCT : 00
	03	1 - 20 120 - 12 6 - 65 192 - 19.2	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K 60 - 6000K 65 - 6500K