







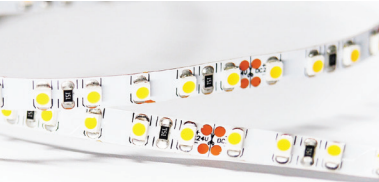


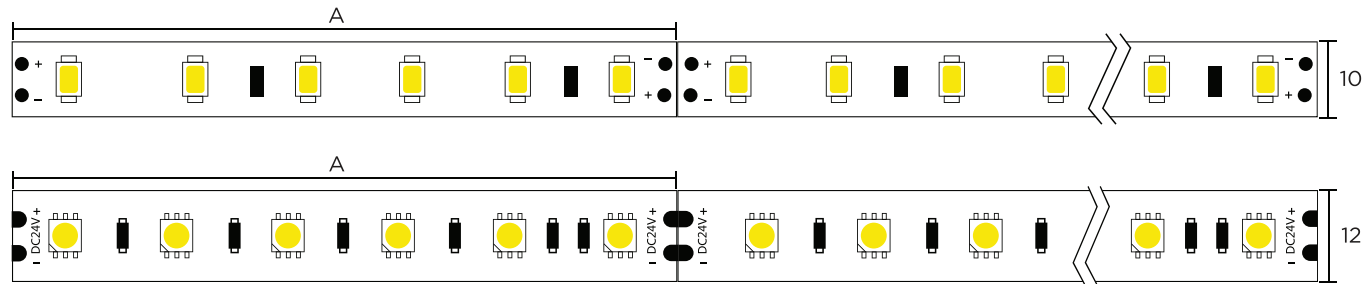
# StripMaster-6 (SM-06)

TUNABLE WHITE AND  
COLOR CHANGING



 DC 24V	 Compliant	 3 STEP MacAdam	 Dimmable	 Stabilized Current	 3-year Warranty	 Certificate	 Certified Product
--	---	---	--	---	--	---	--

DIMENSION : mm.



## General Information

To produce our indoor and outdoor flexible LED strips and a current stabilization system inside the LED strip.

Thermal conductive adhesive tape guarantees perfect heat transfer to the mounting surface. All of our product features guarantee extra on life time and stable performance.

Our flexible LED light strips are designed for long-term professional lighting applications and perfectly fit in any linear or curved applications.

**StripMaster-6 is designed for RGB, RGBW color and tunable white.**

## Standard Information

Chip:	2835 / 5050 / 4040
Input Voltage (V) :	24V
PCB Color :	White
IP :	20 / 65
Strip Length :	5 m. / Reel
CRI :	80



## Technical Data For **SM-06**

Chip	LED Qty/m	Power (W)	Luminance (lm/m)	Cutting Length (A) (mm)	PCB Width (mm)	LED Color (CCT)
5050	60	14.4	660	100 (2 in 1)	10	Tunable White
2835	196	20	1000	50	10	Tunable White
5050	60	14.4	-	100 (3 in 1)	10	RGB
5050	60	19.2	-	100 (4 in 1)	12	RGBW
4040	120	21.6	-	50	10	RGB

Remark: PCB of waterproof type might be wider.

## Order Code

Series :	IP / Power (W)	CCT :
SM - 06	0 / 000	00
06	1 - 20 144 - 14.4	X1 - RGB
	6 - 65 192 - 19.2	X2 - RGBW
	200 - 20	X7 - Tunable White
	216 - 21.6	