




StripMaster-5 (SM-05)

SIDE EMITTING

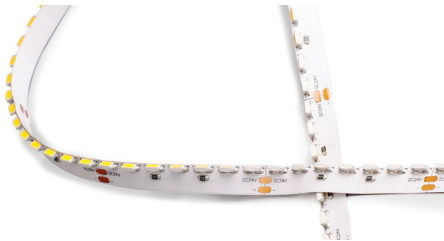

							
DC 24V	Compliant	3 STEP MacAdam	Dimmable	Stabilized Current	3-year Warranty	Certificate	Certified Product

DIMENSION : mm.

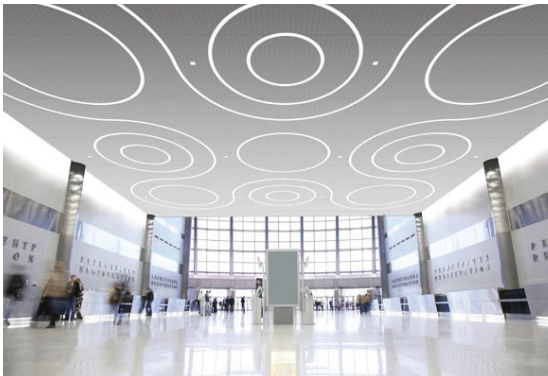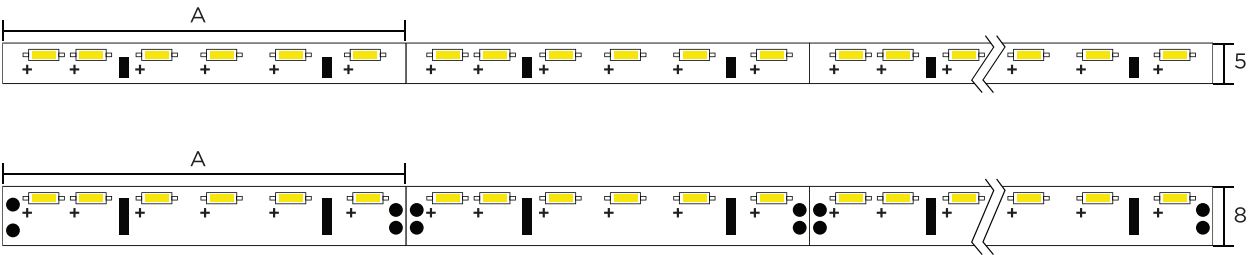

General Information

To produce our indoor and outdoor flexible LED strips and a current stabilization system inside the LED strip.

Thermal conductive adhesive tape guarantees perfect heat transfer to the mounting surface. All of our product features guarantee extra on life time and stable performance.

Our flexible LED light strips are designed for long-term professional lighting applications and perfectly fit in any linear or curved applications.

StripMaster-5 is designed as side emitting for curve function.

Standard Information

Chip:	3014 / 4020
Input Voltage (V) :	24V
PCB Color :	White
IP :	20 / 65
Strip Length :	5 m. / Reel
CRI :	>80

Technical Data For **SM-05**

2700K

3000K

3500K

4000K

6000K

6500K

Chip	LED Qty/m	Power (W)	Luminance (lm/m)	Cutting Length (A) (mm)	PCB Width (mm)
3014	60	6	480	50	5
3014	120	12	950	100	5
4020	120	9.6	1100	8.33	8
4020	140	14.4	1800	50	8

Remark: PCB of waterproof type might be wider.

Order Code

Series :	IP / Power (W)	CCT :
SM - 05	0 / 000	00
05	1 - 20	27 - 2700K
	6 - 65	30 - 3000K
	060 - 6	35 - 3500K
	096 - 9.6	40 - 4000K
	120 - 12	60 - 6000K
	144 - 14.4	65 - 6500K